





SOMMER External Receiver

External receiver works with 12-24v AC or DC

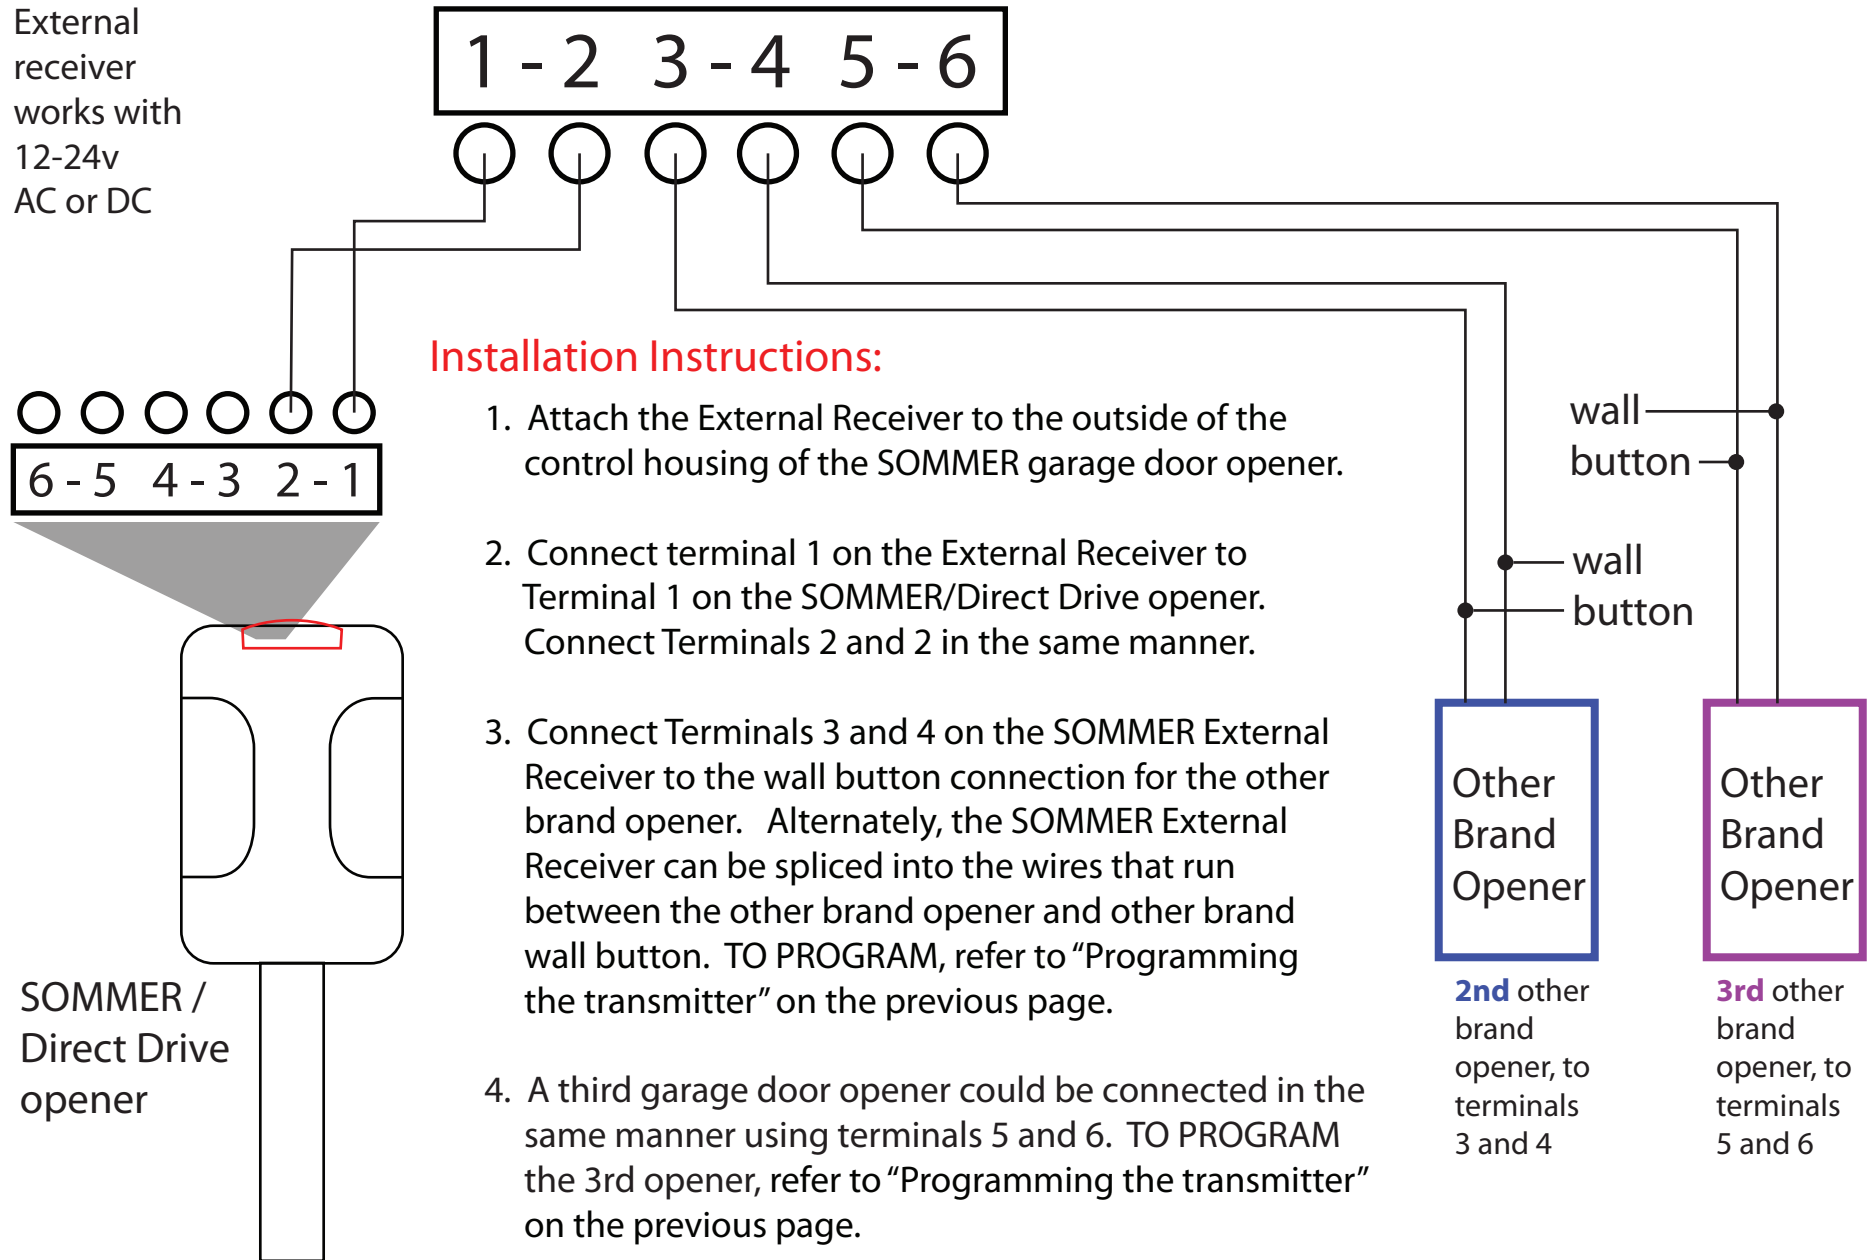

Installation Instructions:

1. Attach the External Receiver to the outside of the control housing of the SOMMER garage door opener.
2. Connect terminal 1 on the External Receiver to Terminal 1 on the SOMMER/Direct Drive opener. Connect Terminals 2 and 2 in the same manner.
3. Connect Terminals 3 and 4 on the SOMMER External Receiver to the wall button connection for the other brand opener. Alternately, the SOMMER External Receiver can be spliced into the wires that run between the other brand opener and other brand wall button. TO PROGRAM, refer to "Programming the transmitter" on the previous page.
4. A third garage door opener could be connected in the same manner using terminals 5 and 6. TO PROGRAM the 3rd opener, refer to "Programming the transmitter" on the previous page.

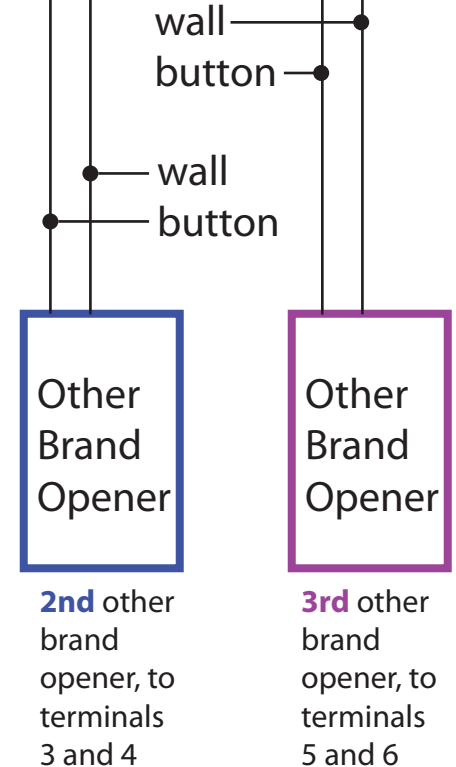

2nd other brand opener, to terminals 3 and 4

3rd other brand opener, to terminals 5 and 6